

									
EU	US	Standard	Strong	Extra Strong	Barrier	Anti-Static	Recycled	Bio-degradable	Paper
200x80mm	8"x3"		900 m - 2925'						250 m - 820'
			4 m³ - 141 cuft/roll						1.0 m³ - 36 cuft/roll
			37.9095						37.9395
200x135mm	8"x5.5"	1100 m - 3609'	900 m - 2952'			650 m - 2132'	900 m - 2952'	500 m - 1640'	250 m - 820'
		6 m³ - 212 cuft/roll	5 m³ - 176 cuft/roll			4 m³ - 141 cuft/roll	5 m³ - 176 cuft/roll	3 m³ - 80 cuft/roll	1.5 m³ - 48 cuft/roll
		37.9083	37.9082			37.9363	37.9375	37.9377	37.9387
200x200mm	8"x8"	1100 m - 3609'	900 m - 2952'						250 m - 820'
		9 m³ - 318 cuft/roll	8 m³ - 282 cuft/roll						2 m³ - 72 cuft/roll
		37.9085	37.9084						37.9390
300x135mm	12"x5"		600 m - 1968'	450 m - 1476'					250 m - 820'
			5 m³ - 176 cuft/roll	4 m³ - 141 cuft/roll					2 m³ - 72 cuft/roll
			37.9347	37.9353					37.9390
400x150mm 2 Pads	16"x6" 2 Pads	500 m - 1640'			In development				
		9 m³ - 318 cuft/roll							
		37.9348							
400x115mm 3 Pads	16"x4.5" 3 Pads	500 m - 1640'							
		200 m² - 2150 sqft/roll							
		37.9366							
400x150mm 8 Pads	16"x6" 8 Pads	500 m - 1640'		350 m - 1148'	In development	350 m - 1148'	500 m - 1640'	250 m - 820'	250 m - 820'
		200 m² - 2150 sqft/roll		140 m² - 1507 sqft/roll		140 m² - 1507 sqft/roll	200 m² - 2150 sqft/roll	100 m² - 1076 sqft/roll	100 m² - 1076 sqft/roll
		37.9345		37.9350		37.9364	37.9376	37.9382	37.9386
400x300 BBL1	16"x12" BBL1			350 m - 1148'			500 m - 1640'		
				140 m² - 1507 sqft/roll			200 m² - 2152 sqft/roll		
				37.9369			37.9394		
600x300mm BBL1 (1)	24"x12" BBL1						300 m - 984'		
							180 m² - 1937 sqft/roll		
							37.9398		
800x300 mm BBL1 (1)	32"x12" BBL1						225 m - 738'		
							180 m² - 1937 sqft/roll		
							37.9399		

Article number 28.0039EN Subject to changes

AP1000

ALL-IN-ONE



Another
Smart Solution
by FROMM

Contact

Ian McHaffie
Equipment Sales Specialist
imchaffie@frommpackaging.ca
Tel. +1 905 428 3444
Mobile +1 365 885 3927



Subject to changes

AP1000 ALL-IN-ONE

4th Generation Universal Air-cushion System

**Works with all
available materials
and patterns**

- PE, rPE, Bio, Paper
- Up to 800mm width
- Air-cushions or bubble on demand




Innovative

- 2-side sealings for a better control and superior sealing strength
- Patented no contact end of the roll sensor
- Touch screen for easy machine control



Technical specifications

- Weight: 11,5 Kg - 31.9 lbs
- Dimensions (hxlxw):
430x390x360 mm
(roll 200) 16.9x15.4x14.2"
- Speed: 20m/min. -
65.6 ft/min.
- Power supply:
100-240V, 50/60 Hz
- Item code: 50.2105

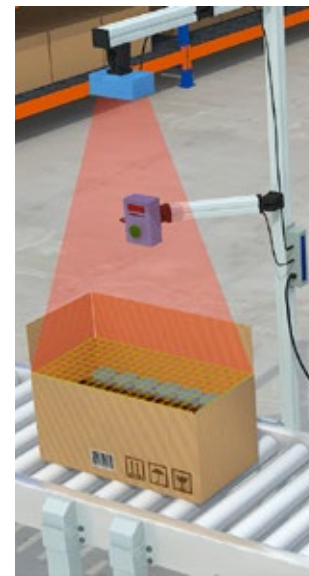

Accessories/integration

- Compact bin - 50.2134
- Hopper - 50.2135
- Winder - 50.2136
- Shooter/Separator - 50.2130
- SmartFill scanner - 50.100250
- Custom designed solutions

Eye catching benefits

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • Compact, small footprint • Easy to integrate • Easy to operate • 2 way M2M Communication for optimum uptime | <ul style="list-style-type: none"> • Excellent working conditions • Superior productivity, up to 20 m/min. - 65.6 ft/min. • Adjustable filling rate • Manual or (semi) automatic operation | <ul style="list-style-type: none"> • Production of calibrated volumes possible in combination with a SmartFill scanner / shooter (option) • Optional collection of extended usage statistics via an IIoT Gateway |
|--|--|--|

Custom designed solutions

- FROMM is present at all steps of your project, from Identification of needs to installation and full maintenance off the line
- FROMM's end-of-the line expertise ensures reliable solutions, increased productivity and optimum ergonomics



**On-time
delivery**



Optimum working conditions



Profitable equipment



Flexible financing

FROMM | PROTECTING SOLUTIONS

A 5-STEP PROCESS

- 1 **Needs identification**
Audit questionnaire for accurate description of requirements
- 2 **Integration approach**
2D-/3D drawings within 2 weeks
Quotation Lead time
- 3 **System manufacturing**
- 4 **Installation & commissioning**
- 5 **Maintenance & Support**

AirpadTM
BY FROMM

IIoT Gateway

Our solution for automated process monitoring

- The IIoT-Gateway™ connects the Airpad AP1000 safely with the cloud. Once connected, the
- data about the machines condition, operation parameters, usages of consumables and wear
- levels of parts is sent. It can then be visualized in real time and analyzed through the FROMM IIoT
- Platform to optimize the uptime, efficiency and service of the monitored machine.
- Monitoring machines remotely
- Optimizing preventative maintenance
- Shortening machine service
- Material usage follow-up

System-setup:

